


AKYVER® SUN TYPE 10 WALL 50 mm

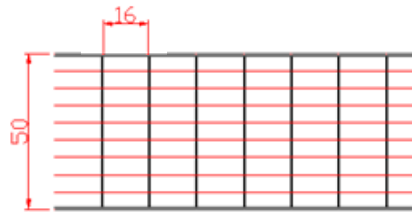

Technical characteristics :

Thickness (mm):	50 mm
UV protection:	coextrusion
Weight:	4500 gr/m ²
Width:	1220 mm closed edges
Length:	6 and 7m
Light transmission:	Opal : 42 % – clear : 65 %
Thermal insulation:	0,80 W/m ² °C
Linear expansion:	4mm/ml/°C
Usage temperature:	-40°C / +110°C
Acoustic insulation:	22 dB

Loads

(kN/m ²)	0.50	0.75	0.90	1.25	1.50	2.0	Width mm
Length of sheet	>6.0	>6.0	>6.0	>6.0	5.6	5.0	1050/980
	>6.0	>6.0	>6.0	5.6	4.7	4.0	1250

The information contained in this document is for information purposes and is non-contractual. The manufacturer reserves the right to change the product and its technical characteristics. This information has been supplied in good faith and does not in any way constitute a guarantee for specific conditions of use.